



By reducing the amount of friction created during a wire pull, SuperSlick Elite® can increase your ability to maintain a productive, safe and cost-effective job site. SuperSlick Elite features a slick but never slippery or greasy outer jacket for easy pulling without additional lubricant.

Our new formula is tougher and faster to pull

Sunlight-resistant in all colors and in sizes 18 AWG through 1000 KCMIL

SUPERSLICK ELITE®

Slick without the grease and mess, our SuperSlick Elite® won't leave residue or disappointment on your next wire pull

### SuperSlick Elite Limited Warranty

Encore guarantees that our SuperSlick Elite® brand of cables may be installed without the need for additional lubricant to ease the pulling of cables through PVC or metal conduit.

For more information on our warranty, please scan QR code to the right.




## SUPERSLICK ELITE, YOUR FORMULA FOR EFFICIENCY AND SUCCESS!



SuperSlick Elite® products are available in all colors and sizes to simplify complex wiring jobs, eliminate phase tape and save you time & money.



SuperSlick Elite®, as with all of our products, is backed by our industry-leading warranty and unmatched fill-rates.

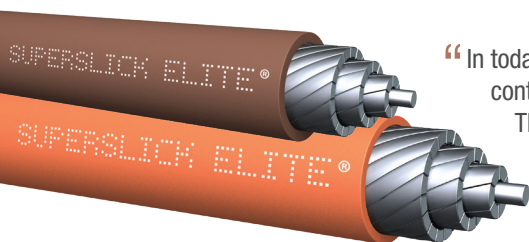

“ In today's competitive markets, there are few remaining ways for us to separate ourselves from the other contractors. One being the cut to the amount of labor involved in completing the projects we are awarded. This not only adds back into our bottom dollar, but also shows our customer base that we are able to get our projects done efficiently and on time. ”

*Nick Johnson, Ault Electric*



1.800.962.9473 | [encorewire.com](http://encorewire.com)

THHN/THWN-2 SUPERSLICK ELITE®	Copper				Aluminum			
	Size (AWG or KCMIL)	PVC Insulation Thickness (in)	Nylon Jacket Thickness (in)	Outside Diameter (in)	Size (AWG or KCMIL)	PVC Insulation Thickness (in)	Nylon Jacket Thickness (in)	Outside Diameter (in)
18*	0.015	0.004	0.088		18	--	--	--
16*	0.015	0.004	0.101		16	--	--	--
14	0.015	0.004	0.109		14	--	--	--
12	0.015	0.004	0.128		12	--	--	--
10	0.020	0.004	0.161		10	--	--	--
8	0.030	0.005	0.213		8	0.030	0.005	0.204
6	0.030	0.005	0.249		6	0.030	0.005	0.239
4	0.040	0.006	0.318		4	0.040	0.006	0.305
3	0.040	0.006	0.346		3	0.040	0.006	0.330
2	0.040	0.006	0.378		2	0.040	0.006	0.360
1	0.050	0.007	0.435		1	0.050	0.007	0.413
1/0	0.050	0.007	0.474		1/0	0.050	0.007	0.450
2/0	0.050	0.007	0.518		2/0	0.050	0.007	0.490
3/0	0.050	0.007	0.568		3/0	0.050	0.007	0.537
4/0	0.050	0.007	0.624		4/0	0.050	0.007	0.589
250	0.060	0.008	0.678		250	0.060	0.008	0.656
300	0.060	0.008	0.730		300	0.060	0.008	0.706
350	0.060	0.008	0.777		350	0.060	0.008	0.752
400	0.060	0.008	0.821		400	0.060	0.008	0.795
500	0.060	0.008	0.902		500	0.060	0.008	0.872
600	0.070	0.009	1.051		600	0.070	0.009	0.971
700	--	--	--		700	0.070	0.009	1.035
750	0.070	0.009	1.156		750	0.070	0.009	1.066
900	--	--	--		900	0.070	0.009	1.157
1000	0.070	0.009	1.310		1000	0.070	0.009	1.220

\* Available only in TFN/TFN SuperSlick Elite copper conductors.

XHHW-2 SUPERSLICK ELITE®	Copper			Aluminum		
	Size (AWG or KCMIL)	XLPE Insulation Thickness (in)	Outside Diameter (in)	Size (AWG or KCMIL)	XLPE Insulation Thickness (in)	Outside Diameter (in)
14	0.030	0.131		14	--	--
12	0.030	0.150		12	--	--
10	0.030	0.173		10	--	--
8	0.045	0.236		8	0.045	0.224
6	0.045	0.274		6	0.045	0.259
4	0.045	0.322		4	0.045	0.303
3	0.045	0.350		3	0.045	0.328
2	0.045	0.382		2	0.045	0.358
1	0.055	0.431		1	0.055	0.409
1/0	0.055	0.470		1/0	0.055	0.446
2/0	0.055	0.514		2/0	0.055	0.486
3/0	0.055	0.564		3/0	0.055	0.533
4/0	0.055	0.620		4/0	0.055	0.585
250	0.065	0.672		250	0.065	0.650
300	0.065	0.724		300	0.065	0.700
350	0.065	0.771		350	0.065	0.746
400	0.065	0.815		400	0.065	0.789
500	0.065	0.896		500	0.065	0.866
600	0.080	1.053		600	0.080	0.973
700	--	--		700	0.080	1.037
750	0.080	1.158		750	0.080	1.068
900	--	--		900	0.080	1.159
1000	0.080	1.312		1000	0.080	1.220

