



By reducing the amount of friction created during a wire pull, SuperSlick Elite® can increase your ability to maintain a productive, safe and cost-effective job site. SuperSlick Elite® features a slick but never slippery or greasy outer jacket for easy pulling without additional lubricant.

Our new formula is tougher and faster to pull

Sunlight-resistant in all colors and in sizes 18 AWG through 1000 KCMIL

SUPERSLICK ELITE®

Slick without the grease and mess, our SuperSlick Elite® won't leave residue or disappointment on your next wire pull

### SuperSlick Elite® Limited Warranty

Encore guarantees that our SuperSlick Elite® brand of cables may be installed without the need for additional lubricant to ease the pulling of cables through PVC or metal conduit.

For more information on our warranty, please scan QR code to the right.




**SUPERSLICK ELITE®, YOUR FORMULA FOR EFFICIENCY AND SUCCESS!**



SuperSlick Elite® products are available in all colors and sizes to simplify complex wiring jobs, eliminate phase tape and save you time & money.



SuperSlick Elite®, as with all of our products, is backed by our industry-leading warranty and unmatched fill-rates.

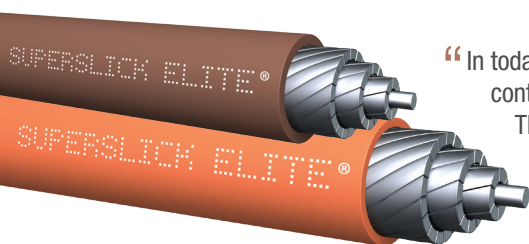

“ In today's competitive markets, there are few remaining ways for us to separate ourselves from the other contractors. One being the cut to the amount of labor involved in completing the projects we are awarded. This not only adds back into our bottom dollar, but also shows our customer base that we are able to get our projects done efficiently and on time. ”

*Nick Johnson, Ault Electric*



1.800.962.9473 | [encorewire.com](http://encorewire.com)

**THHN/THWN-2  
SUPERSLICK ELITE®**

| Copper                 |                                     |                                   |                             | Aluminum               |                                     |                                   |                             |
|------------------------|-------------------------------------|-----------------------------------|-----------------------------|------------------------|-------------------------------------|-----------------------------------|-----------------------------|
| Size<br>(AWG or KCMIL) | PVC Insulation<br>Thickness<br>(in) | Nylon Jacket<br>Thickness<br>(in) | Outside<br>Diameter<br>(in) | Size<br>(AWG or KCMIL) | PVC Insulation<br>Thickness<br>(in) | Nylon Jacket<br>Thickness<br>(in) | Outside<br>Diameter<br>(in) |
| 14                     | 0.015                               | 0.004                             | 0.109                       | 14                     | --                                  | --                                | --                          |
| 12                     | 0.015                               | 0.004                             | 0.128                       | 12                     | --                                  | --                                | --                          |
| 10                     | 0.020                               | 0.004                             | 0.161                       | 10                     | --                                  | --                                | --                          |
| 8                      | 0.030                               | 0.005                             | 0.213                       | 8                      | 0.030                               | 0.005                             | 0.204                       |
| 6                      | 0.030                               | 0.005                             | 0.249                       | 6                      | 0.030                               | 0.005                             | 0.239                       |
| 4                      | 0.040                               | 0.006                             | 0.318                       | 4                      | 0.040                               | 0.006                             | 0.305                       |
| 3                      | 0.040                               | 0.006                             | 0.346                       | 3                      | 0.040                               | 0.006                             | 0.330                       |
| 2                      | 0.040                               | 0.006                             | 0.378                       | 2                      | 0.040                               | 0.006                             | 0.360                       |
| 1                      | 0.050                               | 0.007                             | 0.435                       | 1                      | 0.050                               | 0.007                             | 0.413                       |
| 1/0                    | 0.050                               | 0.007                             | 0.474                       | 1/0                    | 0.050                               | 0.007                             | 0.450                       |
| 2/0                    | 0.050                               | 0.007                             | 0.518                       | 2/0                    | 0.050                               | 0.007                             | 0.490                       |
| 3/0                    | 0.050                               | 0.007                             | 0.568                       | 3/0                    | 0.050                               | 0.007                             | 0.537                       |
| 4/0                    | 0.050                               | 0.007                             | 0.624                       | 4/0                    | 0.050                               | 0.007                             | 0.589                       |
| 250                    | 0.060                               | 0.008                             | 0.678                       | 250                    | 0.060                               | 0.008                             | 0.656                       |
| 300                    | 0.060                               | 0.008                             | 0.730                       | 300                    | 0.060                               | 0.008                             | 0.706                       |
| 350                    | 0.060                               | 0.008                             | 0.777                       | 350                    | 0.060                               | 0.008                             | 0.752                       |
| 400                    | 0.060                               | 0.008                             | 0.821                       | 400                    | 0.060                               | 0.008                             | 0.795                       |
| 500                    | 0.060                               | 0.008                             | 0.902                       | 500                    | 0.060                               | 0.008                             | 0.872                       |
| 600                    | 0.070                               | 0.009                             | 1.051                       | 600                    | 0.070                               | 0.009                             | 0.971                       |
| 700                    | --                                  | --                                | --                          | 700                    | 0.070                               | 0.009                             | 1.035                       |
| 750                    | 0.070                               | 0.009                             | 1.156                       | 750                    | 0.070                               | 0.009                             | 1.066                       |
| 900                    | --                                  | --                                | --                          | 900                    | 0.070                               | 0.009                             | 1.157                       |
| 1000                   | 0.070                               | 0.009                             | 1.310                       | 1000                   | 0.070                               | 0.009                             | 1.220                       |

**XHHW-2  
SUPERSLICK ELITE®**

| Copper                 |                                      |                          | Aluminum               |                                      |                          |
|------------------------|--------------------------------------|--------------------------|------------------------|--------------------------------------|--------------------------|
| Size<br>(AWG or KCMIL) | XLPE Insulation<br>Thickness<br>(in) | Outside Diameter<br>(in) | Size<br>(AWG or KCMIL) | XLPE Insulation<br>Thickness<br>(in) | Outside Diameter<br>(in) |
| 14                     | 0.030                                | 0.131                    | 14                     | --                                   | --                       |
| 12                     | 0.030                                | 0.150                    | 12                     | --                                   | --                       |
| 10                     | 0.030                                | 0.173                    | 10                     | --                                   | --                       |
| 8                      | 0.045                                | 0.236                    | 8                      | 0.045                                | 0.224                    |
| 6                      | 0.045                                | 0.274                    | 6                      | 0.045                                | 0.259                    |
| 4                      | 0.045                                | 0.322                    | 4                      | 0.045                                | 0.303                    |
| 3                      | 0.045                                | 0.350                    | 3                      | 0.045                                | 0.328                    |
| 2                      | 0.045                                | 0.382                    | 2                      | 0.045                                | 0.358                    |
| 1                      | 0.055                                | 0.431                    | 1                      | 0.055                                | 0.409                    |
| 1/0                    | 0.055                                | 0.470                    | 1/0                    | 0.055                                | 0.446                    |
| 2/0                    | 0.055                                | 0.514                    | 2/0                    | 0.055                                | 0.486                    |
| 3/0                    | 0.055                                | 0.564                    | 3/0                    | 0.055                                | 0.533                    |
| 4/0                    | 0.055                                | 0.620                    | 4/0                    | 0.055                                | 0.585                    |
| 250                    | 0.065                                | 0.672                    | 250                    | 0.065                                | 0.650                    |
| 300                    | 0.065                                | 0.724                    | 300                    | 0.065                                | 0.700                    |
| 350                    | 0.065                                | 0.771                    | 350                    | 0.065                                | 0.746                    |
| 400                    | 0.065                                | 0.815                    | 400                    | 0.065                                | 0.789                    |
| 500                    | 0.065                                | 0.896                    | 500                    | 0.065                                | 0.866                    |
| 600                    | 0.080                                | 1.053                    | 600                    | 0.080                                | 0.973                    |
| 700                    | --                                   | --                       | 700                    | 0.080                                | 1.037                    |
| 750                    | 0.080                                | 1.158                    | 750                    | 0.080                                | 1.068                    |
| 900                    | --                                   | --                       | 900                    | 0.080                                | 1.159                    |
| 1000                   | 0.080                                | 1.312                    | 1000                   | 0.080                                | 1.220                    |

