

TYPE TRIPLEX - EC-1350 SERIES ALUMINUM - OVERHEAD SERVICE DROP - 600V

ACSR - ALUMINUM CONDUCTOR STEEL REINFORCED SUPPORTING NEUTRAL

ENGINEERING SPECIFICATIONS

Standards

Compact Stranded Aluminum Alloy 1350 Series per ASTM B232, ASTM B233, ASTM B836; ANSI/CEA S-76-474; ARRA 2009 Section 1605 "Buy American" Compliant; RUS Accepted; RoHS Compliant



CONSTRUCTION

Conductors

Insulated Conductors: Compact Stranded Aluminum Alloy 1350 Series per ASTM B230, ASTM B231, ASTM B609, and ASTM B836

Neutral Conductor: Stranded Aluminum Steel Reinforced (ACSR), 1350 Series Alloy Bare Supporting Neutral with Steel Support Center Wire per ASTM B230 and ASTM B232

Insulation


Cross-link polyethylene (XLPE) black insulation per ANSI/CEA S-76-474, rated 90°C wet or dry

APPLICATIONS

Triplex overhead service drop cable with ACSR 1350 Series alloy supporting neutral is designed for applications not exceeding 600 volts with a maximum conductor operating temperature of 90°C wet or dry. Primarily used for delivering single phase power from utility power lines or transformers to the service point of a building or structure. Suitable for 120/240V aerial service for outdoor lighting or for temporary service at construction sites.

FEATURES

Triplex overhead service drop cable has two black XLPE insulated aluminum conductors cabled around a bare-stranded ACSR 1350 Series alloy supporting neutral with steel support center wire. Superior weather, abrasion, crush, and sunlight-resistant XLPE insulation rated 90°C operation wet or dry. Manufactured and tested according to ANSI/CEA S-76-474: Standard for Neutral Supported Power Cable Assemblies with Weather-Resistant Extruded Insulations Rated 600 Volts. Insulated conductors are surface printed for identification.

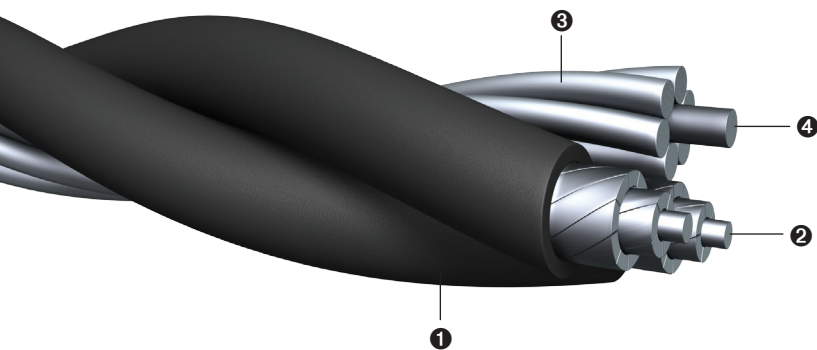

- 1 XLPE Insulation
- 2 Compact Stranded Conductor, EC-1350 Series
- 3 Stranded Aluminum Conductor Steel Reinforced Supporting Neutral (ACSR), EC-1350 Series
- 4 Steel Support Center Wire

Code Name	Conductor Sizes (AWG)	Phase Conductors				Bare Neutral Conductor					Ampacity (XLPE) ^{1,2}	Diameter of Final Construction (in)	Approximate Net Weight (lbs/1000 ft)	Standard Packaging (ft)
		Size (AWG)	No. of Strands	XLPE Thickness (in)	Outside Diameter (in)	Type	Size (AWG)	No. of Strands	Rated Strength (lbs)	Finished OD (in)				
Voluta	6-6-6	6	7	0.045	0.259	ACSR	6	6+1	1190	0.198	110	0.558	105	500' 1000' 1500' Reels
Strombus	4-4-6	4	7	0.045	0.303	ACSR	6	6+1	1190	0.198	115	0.648	160	500' 1000' 1500' Reels
Periwinkle	4-4-4	4	7	0.045	0.303	ACSR	4	6+1	1860	0.250	115	0.653	175	500' 1000' 1500' Reels
Cockle	2-2-4	2	7	0.045	0.358	ACSR	4	6+1	1860	0.250	150	0.761	230	500' 1000' 1500' Reels
Conch	2-2-2	2	7	0.045	0.358	ACSR	2	6+1	2850	0.316	150	0.771	270	500' 1000' 1500' Reels
Janthina	1/0-1/0-2	1/0	10	0.060	0.456	ACSR	2	6+1	2850	0.316	200	0.967	375	500' 1000' 1500' Reels
Clio	2/0-2/0-1	2/0	12	0.060	0.496	ACSR	1	6+1	3550	0.354	230	1.052	450	500' 1000' 1500' Reels
Neritina	1/0-1/0-1/0	1/0	10	0.060	0.456	ACSR	1/0	6+1	4380	0.398	200	0.980	430	500' 1000' 1500' Reels
Runcina	2/0-2/0-2/0	2/0	12	0.060	0.496	ACSR	2/0	6+1	5300	0.447	230	1.066	520	500' 1000' 1500' Reels
Aega	3/0-3/0-1/0	3/0	15	0.060	0.543	ACSR	1/0	6+1	4380	0.398	350	1.151	560	500' 1000' 1500' Reels
Mursia	3/0-3/0-3/0	3/0	15	0.060	0.543	ACSR	3/0	6+1	6620	0.502	350	1.167	645	500' 1000' 1500' Reels
Cerapsus	4/0-4/0-2/0	4/0	19	0.060	0.595	ACSR	2/0	6+1	5300	0.447	405	1.261	690	500' 1000' 1500' Reels
Zuzara	4/0-4/0-4/0	4/0	19	0.060	0.595	ACSR	4/0	6+1	8350	0.563	405	1.279	800	500' 1000' 1500' Reels

¹ Ampacities shown are for non-NEC applications and are based on the following factors:

a) conductor temperature of 65°C over 25°C ambient temperature

b) 2 ft./sec crosswind

c) .9 coefficient of emissivity, no sun

For NEC® type applications, consult appropriate NEC ampacity section.

The above data is approximate and subject to normal manufacturing tolerances.

² Engineers: Reference the Aluminum Electrical Conductors Handbook.

PRINT LEGEND: ENCORE WIRE CORP (SIZE) AWG EC-1350 AL CDR XLPE SUN-RES 600 VOLT DATE/TIME/OPER/QC