

# UNDERGROUND DISTRIBUTION CABLE - DUPLEX - 1350 SERIES ALUMINUM - 600V

SINGLE-RATED: XLPE INSULATED 90°C

Patents: [encorewire.com/patents](http://encorewire.com/patents)

## ENGINEERING SPECIFICATIONS

### Standards

Underwriters Laboratories® Standards UL-854; ANSI/ICEA S-105-692; IEEE 835-1994; Compact Stranded Aluminum Alloy 1350 Series per ASTM B230, ASTM B231, ASTM B609, ASTM B836; RUS Accepted; RoHS Compliant; ICEA S-81-570; UL Listing #E-174428



## CONSTRUCTION

### Conductors

Compact Stranded Conductors, Aluminum Alloy 1350 Series per ASTM B230, ASTM B231, ASTM B609, and ASTM B836

### Insulation


Cross-link polyethylene (XLPE) insulation per UL-854 and ANSI/ICEA S-105-692.  
Black XLPE insulation on phase conductor, yellow XLPE insulation on grounded (neutral) conductor.

## APPLICATIONS

Duplex construction, single-rated USE-2 cables for underground service entrance applications not exceeding 600 volts. May be used as single-rated type USE-2 for NEC applications, as well as, non-NEC applications, including direct burial, or for installation in ducts or conduits. For wet or dry locations not exceeding 90°C for normal operation, 130°C for emergency overloads, and 250°C under short circuit conditions. All conductors may be used as UL single-rated as USE-2 per UL-854.

## FEATURES

One black XLPE insulated phase conductor cabled together with one yellow XLPE insulated neutral conductor. Superior weather, abrasion, crush, and sunlight-resistant XLPE insulation. Manufactured and tested according to *ANSI/ICEA S-105-692: Standard For 600 Volt Single Layer Thermoset Insulated Utility Underground Distribution Cables*. Also manufactured and tested according to UL-854 for single-rated USE-2 cables. Conductors are surface printed for identification. Excellent ruggedized and mechanical protection.

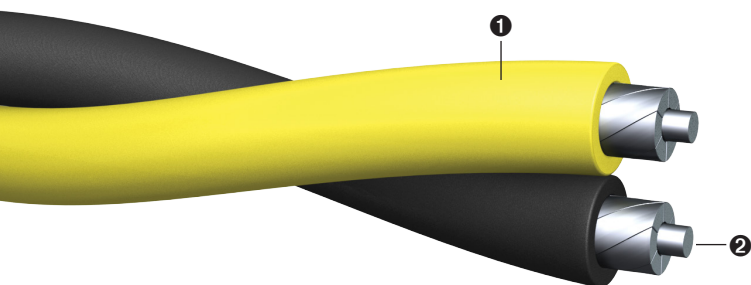

- 1 XLPE Insulation
- 2 Compact Stranded Conductor, EC-1350 Series

Code Name	Conductor Sizes (AWG)	Phase Conductors				Neutral Conductor				Finished Cable		Allowable Ampacities (Amps) for Direct Burial <sup>1</sup>	Standard Packaging (ft)
		Size (AWG)	No. of Strands	XLPE Thickness (in)	Outside Diameter (in)	Size (AWG)	No. of Strands	XLPE Thickness (in)	Outside Diameter (in)	Approximate Net Weight (lbs/1000 ft)	Final Diameter (in)		
Bard	8-8	8	7	0.060	0.254	8	7	0.060	0.254	64	0.508	70	500' 1000' 1500' Reels
Clafin	6-6	6	7	0.060	0.289	6	7	0.060	0.289	88	0.578	112	500' 1000' 1500' Reels
Delgado	4-4	4	7	0.060	0.333	4	7	0.060	0.333	124	0.666	140	500' 1000' 1500' Reels

<sup>1</sup> Ampacities shown are for non-NEC applications and are based on current in phase conductors only per IEEE 835, Standard Power Cable Ampacity Table:

a) 90°C conductor temperature

b) 20°C earth ambient

c) 100% load factor

d) (Rho) = 90°C-cm/watt earth thermal resistivity for three cable, 36" deep burial

For NEC applications, consult appropriate NEC ampacity section. The above data is approximate and subject to normal manufacturing tolerances.

The above data is approximate and subject to manufacturing tolerances.

**PRINT LEGEND:** ENCORE WIRE CORP (SIZE) EC-1350 AL CDR TYPE USE-2 SUN-RES DIR-BUR 600 VOLT XLPE (UL) DATE/TIME/OPER/QC

