

# TYPE QUADRUPLEX - EC-1350 SERIES ALUMINUM - OVERHEAD SERVICE DROP - 600V

## ACSR - ALUMINUM CONDUCTOR STEEL REINFORCED SUPPORTING NEUTRAL

Patents: [encorewire.com/patents](http://encorewire.com/patents)



### ENGINEERING SPECIFICATIONS

#### Standards

Compact Stranded Aluminum Alloy 1350 Series per ASTM B232, ASTM B233, ASTM B836; ANSI/ICEA S-76-474; RUS Accepted; RoHS Compliant

### CONSTRUCTION

#### Conductors

**Insulated Conductors:** Compact Stranded Aluminum Alloy 1350 Series per ASTM B230, ASTM B231, ASTM B609, and ASTM B836

**Neutral Conductor:** Stranded Aluminum Steel Reinforced (ACSR), 1350 Series Alloy Bare Supporting Neutral with Steel Support Center Wire per ASTM B230 and ASTM B232

#### Insulation


Cross-link polyethylene (XLPE) black insulation per ANSI/ICEA S-76-474, rated 90°C wet or dry

### APPLICATIONS

Quadruplex overhead service drop cable with ACSR 1350 Series alloy supporting neutral is designed for applications not exceeding 600 volts with a maximum conductor operating temperature of 90°C wet or dry. Primarily used for delivering single phase power from utility power lines or transformers to the service point of a building or structure. Suitable for 120/240V aerial service for outdoor lighting or for temporary service at construction sites.

### FEATURES

Quadruplex overhead service drop cable has three black XLPE insulated aluminum conductors cabled around a bare-stranded ACSR 1350 Series alloy supporting neutral with steel support center wire. Superior weather, abrasion, crush, and sunlight-resistant XLPE insulation rated 90°C operation wet or dry. Manufactured and tested according to ANSI/ICEA S-76-474: *Standard for Neutral Supported Power Cable Assemblies with Weather-Resistant Extruded Insulations Rated 600 Volts*. Insulated conductors are surface printed for identification.

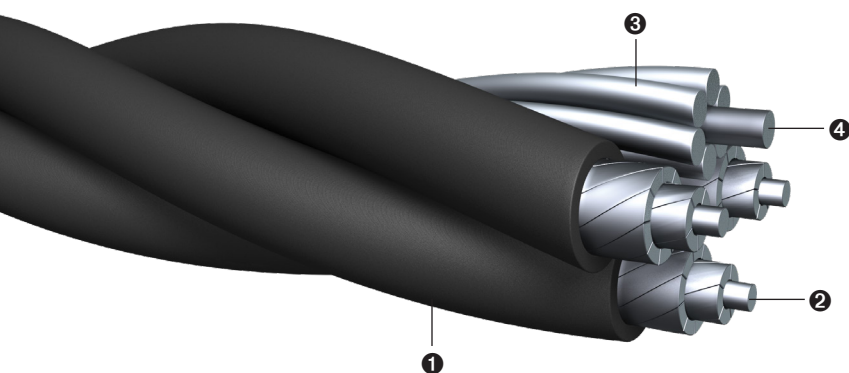

- ❶ XLPE Insulation
- ❷ Compact Stranded Conductor, EC-1350 Series
- ❸ Stranded Aluminum Conductor Steel Reinforced Supporting Neutral (ACSR), EC-1350 Series
- ❹ Steel Support Center Wire

Code Name	Conductor Sizes (AWG)	Phase Conductors				Bare Neutral Conductor					Ampacity (XLPE) <sup>1,2</sup>	Diameter of Final Construction (in)	Approximate Net Weight (lbs/1000 ft)	Standard Packaging (ft)
		Size (AWG)	No. of Strands	XLPE Thickness (in)	Outside Diameter (in)	Type	Size (AWG)	No. of Strands	Rated Strength (lbs)	Finished OD (in)				
Chola	6-6-6-6	6	7	0.045	0.259	ACSR	6	6+1	1190	0.198	105	0.623	150	500' 1000' 1500' Reels
Hackney	4-4-4-4	4	7	0.045	0.303	ACSR	4	6+1	1860	0.250	135	0.729	215	500' 1000' 1500' Reels
Palomino	2-2-2-2	2	7	0.045	0.358	ACSR	2	6+1	2850	0.316	175	0.861	350	500' 1000' 1500' Reels
Costena	1/0-1/0-1/0-1/0	1/0	10	0.060	0.456	ACSR	1/0	6+1	4380	0.398	240	1.097	560	500' 1000' 1500' Reels
Grullo	2/0-2/0-2/0-2/0	2/0	12	0.060	0.496	ACSR	2/0	6+1	5300	0.447	280	1.193	690	500' 1000' 1500' Reels
Suffolk	3/0-3/0-3/0-3/0	3/0	15	0.060	0.543	ACSR	3/0	6+1	6620	0.502	325	1.306	850	500' 1000' 1500' Reels
Appaloosa	4/0-4/0-4/0-4/0	4/0	19	0.060	0.595	ACSR	4/0	6+1	8350	0.563	375	1.431	1060	500' 1000' 1500' Reels

<sup>1</sup> Ampacities shown are for non-NEC applications and are based on the following factors:

a) conductor temperature of 65°C over 25°C ambient temperature

b) 2 ft./sec crosswind

c) .9 coefficient of emissivity, no sun

For NEC® type applications, consult appropriate NEC ampacity section.

The above data is approximate and subject to normal manufacturing tolerances.

<sup>2</sup> Engineers: Reference the Aluminum Electrical Conductors Handbook.

**PRINT LEGEND:** ENCORE WIRE CORP (SIZE) AWG EC-1350 AL CDR XLPE SUN RES 600 VOLT DATE/TIME/OPERATOR/QC

