

TYPE SE-STYLE U - COPPER CONDUCTOR - 600V

ENGINEERING SPECIFICATIONS

Standards

Underwriters Laboratories Standards UL-83, UL-854, UL-2556; Federal Specifications AA59544; NEMA RV 4-2012; NFPA 70 (NEC®) Article 230, 338; ARRA 2009 Section 1605 "Buy American" Compliant; MasterSpec Division 26 Sections 260519, 260523; UL Listing #E-174428



CONSTRUCTION

Conductors

Solid bare, soft copper per ASTM-B3; 7-Strand Class B concentrically stranded per ASTM-B8; 19-Strand combination unilay conductors per ASTM-B787

Insulation:

High dielectric strength, heat and moisture-resistant, black or colored Polyvinyl Chloride (PVC) rated 90°C wet or dry, meeting the requirements of UL-83 for THHN or THWN-2 wire.

Conductor Jacket

Clear Nylon sheath meeting the requirements of UL-83 for THHN or THWN-2

Ground/Neutral Conductor

Soft drawn annealed copper conductors. *Sizes 2 AWG and smaller* have a round, stranded bare ground/neutral conductor laid parallel between the insulated conductors. *Sizes 3 AWG and larger* have bare concentric ground/neutral wires wrapped helically over the insulated conductors.

Overall Jacket

A gray, sunlight- and fungus-resistant PVC jacket


Assembly

Sizes 2 AWG and smaller: Insulated conductors with a round, stranded bare ground/neutral laid parallel between the insulated conductors with glass reinforced tape applied over the core.

Sizes 3 AWG and larger: Insulated conductors with bare concentric ground/neutral wires wrapped helically with glass reinforced tape applied over the core.

APPLICATIONS

For above ground electrical service use from the electric utility power service point to the meter or service entrance panel. This cable is installed in accordance with Article 230 and 338 of the National Electrical Code (NEC) and manufactured to the requirements of Underwriters Laboratories Standard 854. Type SE Style U has a rating of 600 volts.

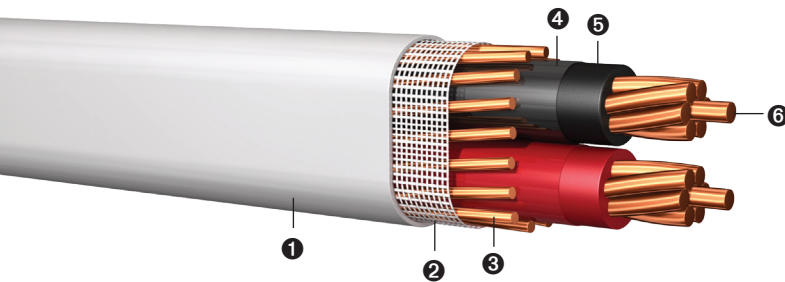

- 1 PVC Jacket
- 2 Glass-Reinforced Tape
- 3 *Solid Bare Ground Conductors
- 4 Nylon Conductor Jacket
- 5 PVC Insulation
- 6 Stranded or Solid Copper Conductor

| Insulated Conductor (AWG) | Insulated Conductor Stranding (No. of Wires) | Grounded/ Neutral Conductor Size (AWG) | Grounded Conductor Stranding (No. of Wires) | Nominal Dimensions | Allowable Ampacity (Amps) ¹ | | Approximate Net Weight (lbs/1000 ft) | Standard Packaging (ft) | |
|---------------------------|--|--|---|--------------------|--|------|--------------------------------------|-------------------------|--------------------------|
| | | | | | 75°C | 90°C | | Coils | Reels |
| 10-10 | Solid | 10 | Solid | 0.295 x 0.455 | 35 | 40 | 142 | 250' | 250', 1000' |
| 8-8 | 7 | 8 | 7 | 0.400 x 0.625 | 50 | 55 | 219 | 250' | 250', 500', 1000', 5000' |
| 6-6 | 7 | 6 | 7 | 0.445 x 0.705 | 65 | 75 | 319 | 150' | 150', 500', 1000', 5000' |
| 6-6 | 7 | 8 | 7 | 0.440 x 0.700 | 65 | 75 | 290 | 200' | 200', 500', 1000', 5000' |
| 4-4 | 7 | 4 | 7 | 0.540 x 0.870 | 85 | 95 | 494 | 150' | 150', 500', 1000', 5000' |
| 4-4 | 7 | 6 | 7 | 0.515 x 0.850 | 85 | 95 | 445 | 150' | 150', 500', 1000' |
| 3-3 | 7 | 3 | 12 | 0.605 x 0.970 | 100 | 115 | 609 | 150' | 150', 500', 1000' |
| 3-3 | 7 | 5 | 12 | 0.570 x 0.930 | 100 | 115 | 547 | 150' | 150', 500', 1000' |
| 2-2 | 7 | 2 | 12 | 0.640 x 1.030 | 115 | 130 | 745 | 100' | 100', 500', 1000' |
| 2-2 | 7 | 4 | 12 | 0.600 x 1.000 | 115 | 130 | 668 | 100' | 100', 500', 1000' |
| 1-1 | 19 | 1 | 12 | 0.720 x 1.180 | 130 | 145 | 941 | - | 500', 1000' |
| 1/0-1/0 | 19 | 1/0 | 18 | 0.740 x 1.240 | 150 | 170 | 1157 | - | 500', 1000' |
| 2/0-2/0 | 19 | 2/0 | 18 | 0.810 x 1.350 | 175 | 195 | 1431 | - | 500', 1000' |
| 3/0-3/0 | 19 | 3/0 | 18 | 0.890 x 1.480 | 200 | 225 | 1775 | - | 500', 1000' |
| 4/0-4/0 | 19 | 2/0 | 15 | 0.888 x 1.518 | 230 | 260 | 1860 | - | 500', 1000' |
| 4/0-4/0 | 19 | 4/0 | 24 | 0.888 x 1.518 | 230 | 260 | 2095 | - | 500', 1000' |

¹ Ampacity of conductors are based on NFPA 70 (NEC) Table 310.15(B)(16). See 110.14(C), 240.4(D), 310.15(B) and 338.10(B)(4) for other limitations where applicable. See NEC 310.15(B)(7) where applicable. The above data is approximate and subject to normal manufacturing tolerances.

PRINT LEGEND: ENCORE WIRE CORP TYPE SE STYLE U THHN OR THWN CDRS 600V 2 CDRS (SIZE) CU 1 CDR (SIZE) CU (UL) ((CDR SIZE1) - (CDR SIZE2) - (GND/NEU SIZE) DATE/ TIME/OPER/QC