

ENGINEERING SPECIFICATIONS

Standards

Underwriters Laboratories Standard UL-44, UL-1277, UL-1581, UL-1685, UL-2556; ASTM Stranding Class B3, B8, B787; Federal Specification A-A-59544, NEMA WC-70/IECE S-95-658; NFPA 70 (NEC®) Article 336, 392; UL-1685 Method 1 (70,000 Btu/hr) Flame Test; NEMA WC 57/IECE S-73-532; IECE T-29-520 (210,000 Btu/hr) Flame Test; ARRA 2009 Section 1605 "Buy American" Compliant; RoHS Compliant; MasterSpec Division 26 Sections 260519, 260523; IEEE 1202 (FT4) optional. UL Listing #E-179429



Listed E-179429

CONSTRUCTION

Conductors

Bare, soft-annealed stranded copper conductors per ASTM-B3, ASTM-B8 and ASTM-B787

Insulation

Cross-linked polyethylene (XLPE) High Heat Water Resistant. Rated for use in wet or dry locations at temperatures not to exceed 90°C dry or wet to meet UL-44 requirements for type XHHW-2 wire. Suitable for use in low-leaking circuits requiring a dielectric constant of 3.5 or less.

Ground Conductor

XLPE insulated green ground

Assembly

The insulated conductors are cabled together with a green insulated ground and with or without fillers as required to form a round compact core. Nylon rip-cord is supplied for easy stripping.

Color Coding


Black insulation with IECE Method 4 printed number

Overall Jacket

Flame retardant, sunlight-resistant, black PVC jacket. Sunlight-resistant overall jacket available in all colors by request. Also available in chlorinated polyethylene jacket (CPE) by request.

APPLICATIONS

Primarily used for connecting power devices in commercial and industrial environments. Suitable for installation in channels, ducts, wireways, cable trays, and raceways. Approved for direct burial in wet or dry locations and outdoors in cable trays where sunlight-resistant rating is required. Cables constructed and listed for applications requiring TC-ER-JP rating. Approved for Class I Division II Hazardous Locations.

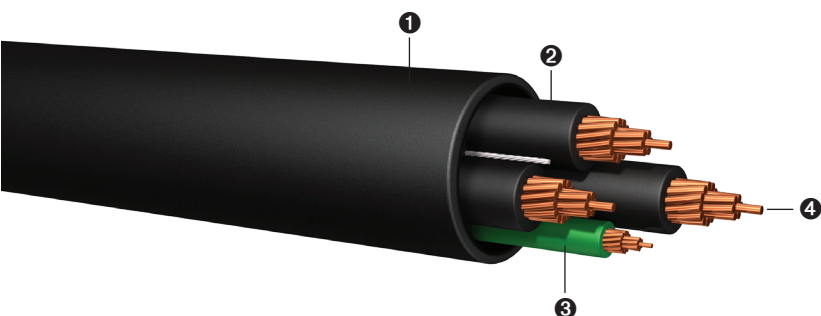

- 1 PVC Jacket
- 2 XLPE Insulation
- 3 Green Insulated Grounding Conductor
- 4 XHHW-2 Stranded Copper Conductors

Size (AWG)	No. of Conductors		Size of Ground Wire (AWG)	Outside Jacket Thickness PVC (in)		Allowable Ampacity (Amps) ¹			Outside Diameter (in)		Approximate Net Weight (lbs/1000 ft)		Standard Packaging (ft)
				3	4	60°C	75°C	90°C	3	4	3	4	
8	3	4	10 AWG Green Insulated	0.060	0.060	40	50	55	0.658	0.728	318	388	1000' 5000' Reels
6	3	4	8 AWG Green Insulated	0.060	0.080	55	65	75	0.758	0.878	455	561	1000' 4000' Reels
4	3	4	8 AWG Green Insulated	0.080	0.080	70	85	95	0.888	0.983	707	903	1000' 3000' Reels
2	3	4	6 AWG Green Insulated	0.080	0.080	85	115	130	1.021	1.134	1032	1290	1000' 2000' Reels
1	3	4	6 AWG Green Insulated	0.080	0.080	95	130	145	1.127	1.256	1206	1645	1000' 2000' Reels
1/0	3	4	6 AWG Green Insulated	0.080	0.080	110	150	170	1.202	1.343	1520	1934	1000' 2000' Reels
2/0	3	4	6 AWG Green Insulated	0.080	0.080	125	175	195	1.289	1.442	1834	2429	500' 1000' 2000' Reels
3/0	3	4	4 AWG Green Insulated	0.080	0.080	145	200	225	1.407	1.576	2252	2882	1000' 2000' Reels
4/0	3	4	4 AWG Green Insulated	0.080	0.110	165	230	260	1.517	1.761	2743	3552	1000' 1500' Reels

¹ Ampacity of conductors are based on NFPA 70 (NEC) Table 310.15(B)(16). See 110.14(C), 240.4(D) and 310.15(B) for other limitations where applicable.

60°C when terminated to equipment for circuits rated 100 amperes or less or marked for size 14 AWG through 1 AWG conductor.

75°C when terminated to equipment for circuits rated over 100 amperes or marked for conductors larger than 1 AWG.

90°C for ampacity derating purposes.

When the neutral is considered current-carrying conductor, the ampacity of 4/C cables shall be reduced by a factor of 0.80 per NEC 310.15(B)(3)(a).

The above data is approximate and subject to normal manufacturing tolerances.

8 AWG THROUGH 4/0 AWG ARE 19 STRANDS PER CONDUCTOR

PRINT LEGEND: ENCORE WIRE CORPORATION (size) TYPE TC-ER-JP CABLE XHHW-2 CDRS SUN-RES 600V DIR-BUR (UL) DATE/TIME/OPER/QC

TYPE TC - POWER CABLE - W/ INSULATED GROUND XHHW-2 INNERS

ENGINEERING SPECIFICATIONS

Standards

Underwriters Laboratories Standard UL-44, UL-1277, UL-1581, UL-1685, UL-2556; ASTM Stranding Class B3, B8, B787; Federal Specification A-A-59544, NEMA WC-70/ICEA S-95-658; NFPA 70 (NEC®) Article 336, 392; UL-1685 Method 1 (70,000 Btu/hr) Flame Test; NEMA WC 57/ICEA S-73-532; ICEA T-29-520 (210,000 Btu/hr) Flame Test; ARRA 2009 Section 1605 "Buy American" Compliant; RoHS Compliant; MasterSpec Division 26 Sections 260519, 260523; IEEE 1202 (FT4) optional. UL Listing #E-179429



Listed E-179429

CONSTRUCTION

Conductors

Bare, soft-annealed stranded copper conductors per ASTM-B3, ASTM-B8 and ASTM-B787

Insulation

Cross-linked polyethylene (XLPE) High Heat Water Resistant. Rated for continuous use in wet or dry locations at temperatures not to exceed 90°C dry or wet to meet UL-44 requirements for type XHHW-2 wire. Suitable for use in low-leaking circuits requiring a dielectric constant of 3.5 or less.

Ground Conductor

XLPE insulated green ground

Assembly

The insulated conductors are cabled together with a green insulated ground and with or without fillers as required to form a round compact core. Nylon rip-cord is supplied for easy stripping.

Color Coding


Black insulation with ICEA Method 4 printed number

Overall Jacket

Flame retardant, sunlight-resistant, black PVC jacket. Sunlight-resistant overall jacket available in all colors by request. Also available in chlorinated polyethylene jacket (CPE) by request.

APPLICATIONS

Primarily used for connecting power devices in commercial and industrial environments. Suitable for installation in channels, ducts, wireways, cable trays, and conduits. Approved for direct burial in wet or dry locations and outdoors in cable trays where sunlight-resistant rating is required. Cables constructed and listed for applications requiring TC-ER-JP rating. Approved for Class I Division II Hazardous Locations.

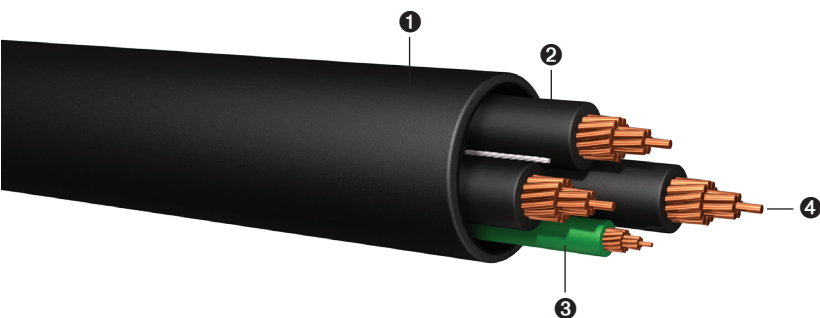

- ① PVC Jacket
- ② XLPE Insulation
- ③ Green Insulated Grounding Conductor
- ④ XHHW-2 Stranded Copper Conductors

Size (AWG)	No. of Conductors		Size of Ground Wire (AWG)	Outside Jacket Thickness PVC (in)		Allowable Ampacity (Amps) ¹			Outside Diameter (in)		Approximate Net Weight (lbs/1000 ft)		Standard Packaging (ft)
				3	4	60°C	75°C	90°C	3	4	3	4	
250	3	4	4	0.080	0.110	215	255	290	1.619	1.880	3158	3994	1000' 1500' Reels
300	3	4	3	0.110	0.110	240	285	320	1.791	2.008	3843	4846	1000' 1500' Reels
350	3	4	3	0.110	0.110	260	310	350	1.892	2.114	4320	5565	1000' 1500' Reels
400	3	4	3	0.110	0.110	280	335	380	1.987	2.212	4857	6288	1000' 1500' Reels
500	3	4	2	0.110	0.110	320	380	430	2.161	2.407	5958	7590	1000' 1500' Reels
600	3	4	2	0.110	0.110	350	420	475	2.444	2.713	7358	9378	1000' 1500' Reels
750	3	4	1	0.110	0.140	400	475	535	2.661	3.019	8752	11307	1000' 1500' Reels

¹ Ampacity of conductors are based on NFPA 70 (NEC) Table 310.15(B)(16). See 110.14(C), 240.4(D) and 310.15(B) for other limitations where applicable.

60°C when terminated to equipment for circuits rated 100 amperes or less or marked for size 14 AWG through 1 AWG conductor.

75°C when terminated to equipment for circuits rated over 100 amperes or marked for conductors larger than 1 AWG.

90°C for ampacity derating purposes.

When the neutral is considered current-carrying conductor, the ampacity of 4/C cables shall be reduced by a factor of 0.80 per NEC 310.15(B)(3)(a).

The above data is approximate and subject to normal manufacturing tolerances.

PRINT LEGEND: ENCORE WIRE CORPORATION (size) TYPE TC-ER-JP CABLE XHHW-2 CDRS SUN-RES 600V DIR-BUR (UL) DATE/TIME/OPER/QC